


REV.	ECO #	DESCRIPTION	DATE	NAME
Α		N/A	3/4/15	MJR

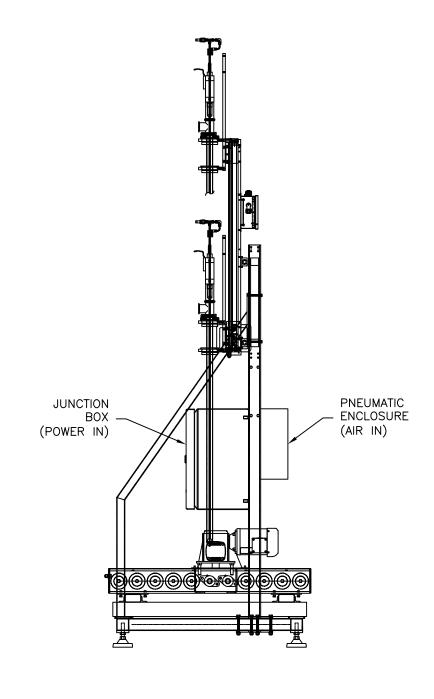

## -NOTE-

- 1) ALL WELDS SHOULD BE GROUND AND POLISHED SMOOTH TO A #3 (150 GRIT) FINISH.
- 2) ALL ROUGH "EDGES SHOULD BE CLEANED OF ANY BÚRR'S.
- 3) ALL ANGLES ARE AT 90° UNLESS OTHERWISE NOTED.
- 4) ALL RADIUS AND CORNERS ARE TO BE A 1/32 UNLESS OTHERWISE NOTED.

DIMENSIONS ARE IN	
INCHES UNLESS	
OTHERWISE NOTED	L
DEMOVE BLIDDS AND	

SHARP EDGES TOLERANCES UNLESS OTHERWISE NOTED:

ANGLES ±0°-30' FRACTIONS ±1/32

MATERIAL



LAYOUT, MEGAFILL

ODEN MACHINERY, INC.

199 FIRE TOWER DRIVE TONAWANDA, NEW YORK USA 14150 PHONE (716)-874-3622 TOLL FREE (800)-658-3622 FAX (716)-874-3000

THIS MATERIAL IS THE EXCLUSIVE PROPERTY OF ODEN MACHINERY, INC. ANY DUPLICATION, RETENTION OR TRANSMITTAL TO OTHERS IS PROHIBITED WITHOUT PRIOR CONSENT.

QTY 3/4/15 MJR 24X MJR ONE (1)